

QUEENS MINI

PROIETTORE LED




LED CE IP20 850°




XM748-169-12-01-3K kgn 0,50
XM748-169-12-02-3K

Potenza assorbita apparecchio
Luminaire power consumption 12W
Flusso luminoso apparecchio
Luminaire luminous flux 1050 lm
3000K 30° Ra 90 220-240V

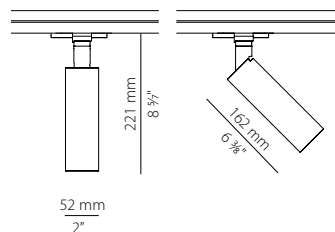



XM748-129-9-01-3K kgn 0,60
XM748-129-9-02-3K

Potenza assorbita apparecchio
Luminaire power consumption 9W
Flusso luminoso apparecchio
Luminaire luminous flux 800 lm
3000K 30° Ra 90 220-240V

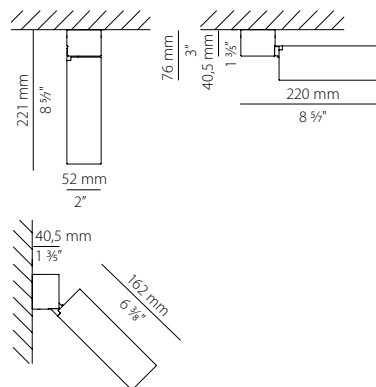

Accessori: ottiche intercambiabili / Replaceable optics accessories:

XMR5 kgn 0,01 24° Mirror Metalized
XMR6 30° Mirror Metalized
XMR7 45° Mirror Metalized

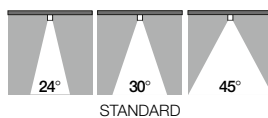

Codici colori disponibili / Colour codes available

01 Bianco / White 02 Nero / Black

Fotometrie e Classi Energetiche disponibili www.panzeri.it / Photometric data and Energy Label available at www.panzeri.it

• UGR < 11 in funzione delle condizioni di installazione
UGR < 11 depending on installation conditions